



CRANEFRIGOR™ – Cooling of crane cabins and crane electronics

www.frigortecamericas.com



CRANFRIGOR™ Compact devices		TX / TY	TB	TC
Dimensions [in] L x W x H	vertical	26.5 x 20.9 x 63.0	23.6 x 35.8 x 50.0	26.0 x 37.8 x 56.3
	horizontal	–	26.7 x 69.5 x 25.2	29.5 x 73.6 x 28.3
Weight approx. [lb]	vertical / horizontal	397 / –	595 / 633	838 / 871
Nominal cooling capacity [btu/h] with R 134a / R513A ¹⁾²⁾		22,000	24,000	42,000
Heating capacity [kW] ²⁾		4	3.5	2.3 – 4.5
CO₂-equivalent [kg] ³⁾	R134a	3.289	6.006	5.720
	R513A	1.451	2.650	2.524
	R450A	1.391	2.541	2.118
Air flow rate, free blowing [cfm]		589 ⁴⁾	706 ⁴⁾	1,177 ⁴⁾



CRANFRIGOR™ Split Units ²⁾		VX	VB	VC
Dimensions [in] L x W x H	Condenser unit	24.8 x 20.9 x 35.8	23.6 x 34.6 x 32.5	26.0 x 36.6 x 35.6
	Weight (Condenser unit) approx. [lb]	154	331	551
Nominal cooling capacity [btu/h] with R 134a / R513A ¹⁾²⁾		22,000	24,000	42,000
Heating capacity [kW] ²⁾		–	–	–
CO₂-equivalent [kg] ³⁾	R134a	6.006	7.436	15.444
	R513A	2.650	3.281	6.878
	R450A	2.360	2.904	6.111
Air flow rate, free blowing [cfm]		–	–	–

¹⁾ With 80 °F indoor temperature, 52% relative indoor air humidity and 95 °F ambient temperature

²⁾ 460 V / 60 Hz (additional operating voltages available)

³⁾ Standard version

⁴⁾ adjustable

Type:	GWP value:	Area of application:
R 134 a	1.430	Up to 160 °F
R513A	631	Up to 160 °F
R450A	605	Up to 185 °F



TD	TF	TH	Self-cleaning filter/ overpressure unit	Condensate evaporator
			FS10	KVW wall mounting
40.2 x 89.4 x 39.2	45.7 x 109.8 x 46.5	49.6 x 69.3 x 99.2	29.9 x 22.4 x 51.6	–
36.6 x 45.7 x 74.8	42.1 x 56.3 x 86.6	53.5 x 134.6 x 55.1	–	21.6 x 5.5 x 9.5
1,385 / 1,455	2,513 / 2,778	2,998 / 3,252	331	44
84,000	120,000	180,000	–	–
3 – 9	3 – 9	3 – 9	–	2 – 3,6
7.865	14.300	21.450	–	–
3.471	6.310	9.465	–	–
3.328	6.050	9.075	–	–
1,471 ⁴⁾	2,826	4,120	882	–



VD	VF	VH	WDV	DV
36.6 x 44.5 x 43.3	42.2 x 54.3 x 48.8	49.6 x 66.1 x 56.7	36.8 x 26.4 x 14.0	36.1 - 83.3 x 35.8 x 10.6
882	1,543	2,094	172	77 – 201
84,000	120,000	180,000	8,000 – 28,000	36,000 – 120,000
–	–	–	2.3 – 3.1	–
34.320	45.617	94.257	–	–
15.270	20.255	41.962	–	–
13.613	18.029	37.268	–	–
–	–	–	441 – 824 ⁴⁾	1,089 – 3,779



The FrigorTec GmbH is certified with DIN EN ISO 9001:2000.

TÜV acceptance testing in our plant.

An additional check at the installation site is not usually necessary for the compact device CRANEFRIGOR™.




CRANEFRIGOR™ – Crane air conditioning units, custom-made and serial production

The V model – Custom-made split devices

V model air conditioning units are split devices: Condenser unit (condenser) and air conditioning part (evaporator) are set up separately. The air conditioning part is connected to the condenser unit with refrigerant lines (see fig. 1).

The air conditioning part is situated directly next to the heat source and works most effectively here. A wide range of individual component combinations allow for an exact output adjustment. The heat absorbed into the air conditioning unit is dissipated with ambient air.

Fig.1 Process principle for the crane air conditioning unit V model

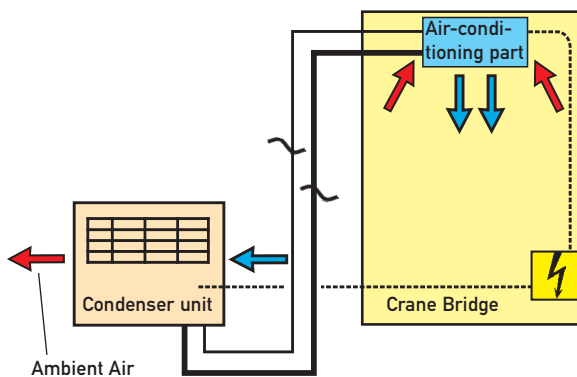

Air conditioning unit is separated from the machine.

Technical features of the V and T models

- Long-lasting condenser made of copper, or on request made with different materials or coated
- Corrosion-resistant housing available for installation in aggressive atmospheres
- Robust sheet-steel construction, designed for extreme shock-loads
- Robust refrigerant compressor in various constructions
- Separate electrical control cabinet in the cooling space (V model) or integrated and air conditioned airconditioning part (T model)
- Painted with acid- and alkaline-resistant paint

The model T – Compact air conditioning units

Compact air-conditioners of the series T consist of two modules: the condenser unit and the air-conditioning part. As shown in the diagram (fig. 2), both modules can be configured in various ways.

This construction unit system allows for simple layout and accommodation to their needs.

The cooled air is guided through channels to the crane bridge or cabin and then, supplemented with fresh air, drawn back by air circulation. The heat absorbed into the air conditioning unit is drawn off with the surrounding air in the condenser unit.

Fig. 2 Possible variation from the T model air conditioning unit and condenser unit


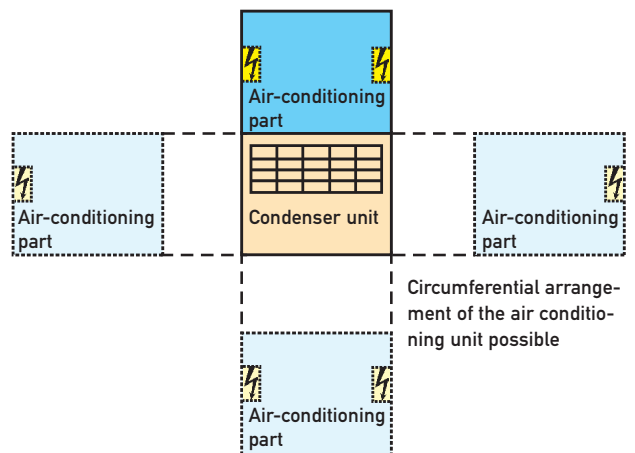


Fig. 3 Circumferential connection of the air duct possible (front view)

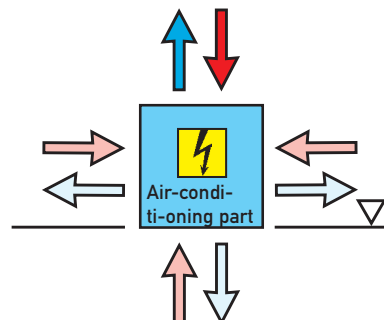

CRANEFRIGOR™ Crane air conditioning for the V and T model – for a higher production safety

In high-heat operating conditions work is done under extreme conditions:

- Very high air temperature
- High thermal radiation and movement of air
- Extreme exposure to dust, odours, and gases
- High noise level

Air-conditioning devices from FrigorTec achieve a good working environment for their employees even under these extreme conditions. A safe and efficient production process can be guaranteed.

Cooled air for man and machine

By air-conditioning the crane cabin, guidelines for workplace regulations are met. Your colleagues work under comfortable, performance-enhancing conditions. Likewise, the crane control unit has to be reliably cooled – operation reliability depends on it.

High performance and variable installation for their application

With a wide product range and concise differentiation of specific performance features air-conditioning devices can be selected to suit their specific on-site requirements.

This guarantees:

- Reliable cooling at ambient temperatures of up to +195° F
- Compact construction with precise machine and air-conditioning unit measurements
- Split construction (V model) allows for a variety of installation options
- Versatile electrical arrangements related with voltage, frequency, and current type

Tried and tested

The calculated machine performance data is checked by our technicians. Where the temperature conditions of high-heat operations are simulated and the machine is operated at the required connected wattage.

Name us your requirements, we'll send you an individual offer.



Examples of application: The air conditioning units for high heat operators can be used in steel works, smelting works, foundries, and mills and many other places.

We pass on only what we have produced by our own hands.



In the main plant in Amtzell, Germany and our facility in the United States all products made by FrigorTec GmbH are developed, constructed and produced. Every device passes a quality inspection with test runs before delivery. FrigorTec solutions are sold in over 80 countries through our worldwide distribution network.

SERVICE
(24 / 7)



Our service keeps the units maintained and ensures the spare parts supply - worldwide.
service@frigortecamericas.com

Grain cooling units
GRANIFRIGOR™

Crane air conditioning
units **CRANEFRIGOR™**

Standard cooling units
STANDARDFRIGOR

Special solutions
SHELTERFRIGOR

Insect heat treatment
DEBUGGER

Hay dryer
AGRIFRIGOR™

Distributor:

FRIGOR-TEC
Cooling to the point

FrigorTec LP • 204 Terra Road
Blytheville, AR72315
phone: +1(832) 730 - 1894
info@frigortecamericas.com
www.frigortecamericas.com